

UXL70-12



Physical Specification





Part Number:	UXL70-12
Length:	348 ± 3 mm (13.70 inches)
Width:	167 ± 3 mm (6.57 inches)
Container Height:	178 ± 3 mm (7.01 inches)
Total Height (with terminal):	178 ± 3 mm (7.01 inches)
Approx Weight:	Approx 22 Kg

Specifications

	Nominal Voltage	12V
	Nominal Capacity (10HR)	70AH
Terminal Type	Standard Terminal	F6
	Optional Terminal	-
Container Material	Standard Option	ABS
	Flame Retardant Option (FR)	ABS (UL94:VO)
Rated Capacity	74.9 AH/3.75A	(20hr,1.80V/cell, 25°C / 77°F)
	70.0 AH/7.00A	(10hr,1.80V/cell, 25°C / 77°F)
	60.9 AH/12.2A	(5hr,1.75V/cell, 25°C / 77°F)
	54.6 AH/18.2A	(3hr,1.75V/cell, 25°C / 77°F)
	43.4 AH/43.4A	(1hr,1.60V/cell, 25°C / 77°F)
Max Discharge Current	840 A (5s)	
Internal Resistance	Approx 6.6mΩ	
Discharge Characteristics	Operating Temp. Range	Discharge: -15 ~ 50°C (5 ~ 122°F)
		Charge: 0 ~ 40°C (32 ~ 104°F)
		Storage: -15 ~ 40°C (5 ~ 104°F)
	Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)
	Cycle Use	Initial Charging Current less than 21.0A. Voltage 14.4V ~ 15.0V at 25°C (77°F) Temp. Coe fficient -30mV/°C
	Standby Use	No limit on Initial Charging Current Voltage 13.5V ~ 13.8V at 25°C (77°F) Temp. Coe fficient -20mV/°C
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Design Floating Life at 20°C	15 Years	
Self Discharge	Ultracell batteries may be stored for up to 6 months at 25°C(°77F) and then a refresh charge is required. For higher temperatures the time interval will be shorter.	

Dimensions

F6 Terminal

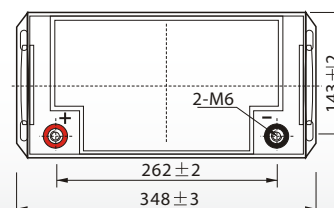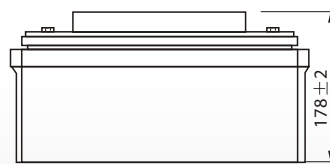


Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	81.9	68.9	61.1	50.7	39.1	33.5	21.7	16.3	13.3	11.2	9.84	7.89	6.78	3.62
1.80V/cell	93.7	77.3	67.6	55.0	42.2	35.3	23.3	17.5	14.2	11.9	10.4	8.30	7.00	3.75
1.75V/cell	106.4	87.2	74.7	59.8	46.0	38.5	24.2	18.2	14.7	12.2	10.7	8.58	7.19	3.84
1.70V/cell	120.2	96.7	82.4	65.3	49.6	40.7	25.5	19.2	15.3	12.9	11.3	8.94	7.46	3.94
1.65V/cell	129.1	103.6	87.7	68.9	52.5	42.1	26.5	19.9	15.9	13.3	11.7	9.25	7.67	4.06
1.60V/cell	142.0	113.4	95.2	73.5	54.5	43.4	27.1	20.4	16.3	13.6	11.9	9.41	7.83	4.13


Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	152.9	129.9	116.4	97.6	76.0	65.2	42.5	32.1	26.4	22.2	19.5	15.7	13.6	7.24
1.80V/cell	172.9	143.9	126.8	104.4	81.3	68.5	45.4	34.3	27.9	23.5	20.6	16.5	14.0	7.48
1.75V/cell	193.3	160.3	138.8	112.5	87.8	74.3	47.0	35.5	28.7	23.9	21.2	17.0	14.3	7.66
1.70V/cell	213.4	175.3	152.1	122.2	94.3	78.4	49.4	37.3	30.0	25.3	22.2	17.7	14.9	7.85
1.65V/cell	227.1	186.3	160.6	127.9	98.9	80.5	51.0	38.6	31.0	26.0	22.9	18.3	15.3	8.09
1.60V/cell	244.2	200.7	172.6	135.5	102.2	82.5	52.0	39.4	31.6	26.5	23.3	18.6	15.6	8.21


Discharge Characteristics

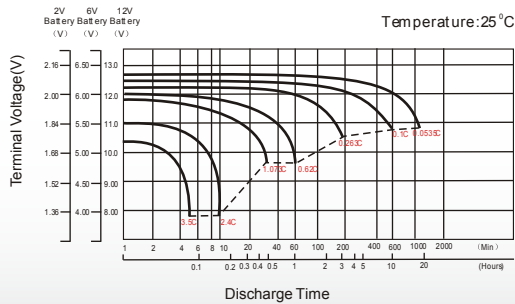


Float Charging Characteristics

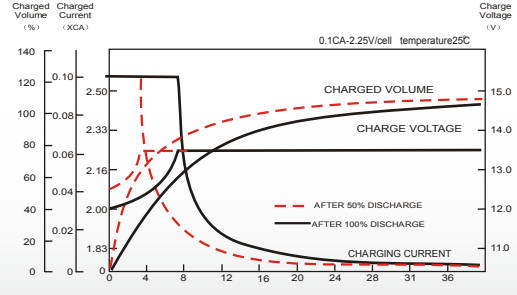


Temperature Effects in Relation to Battery Capacity

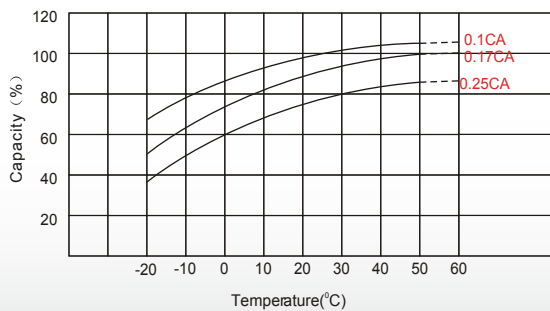

Effect of Temperature on Long Term Float Life

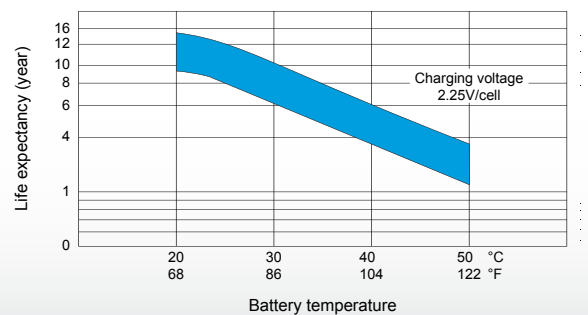

Self Discharge Characteristics

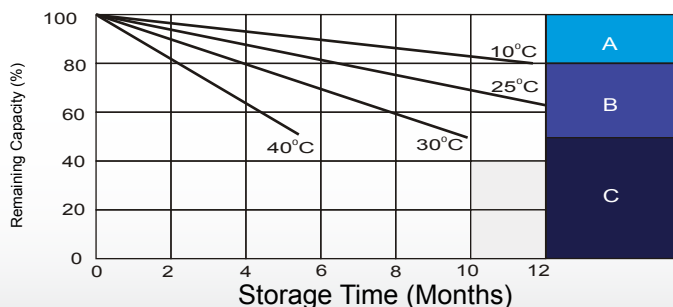

A

B

C

A No supplementary required
(Carryout supplementary charge before use if 100% capacity is required.)

B Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.25V/cell.
 3. Charged for 8 ~ 10 hours at limited current 0.05 CA.

C Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE